


UNIAXIAL BENCH TOP ACOUSTIC P-S1-S2 SYSTEM FOR Ø38.1mm (Ø1.5") SAMPLES COMPLETE WITH STRAINING FRAME

ErgoTech Ltd
 Unit 3 Cae Ffwt Business Park
 Glan Conwy
 Conwy LL28 5SP U K
 Tel. (44) (0)1492 592684
 Fax. (44) (0)1492 592685
 E-mail: sales@ergotech.co.uk
 Web Site: www.ergotech.co.uk

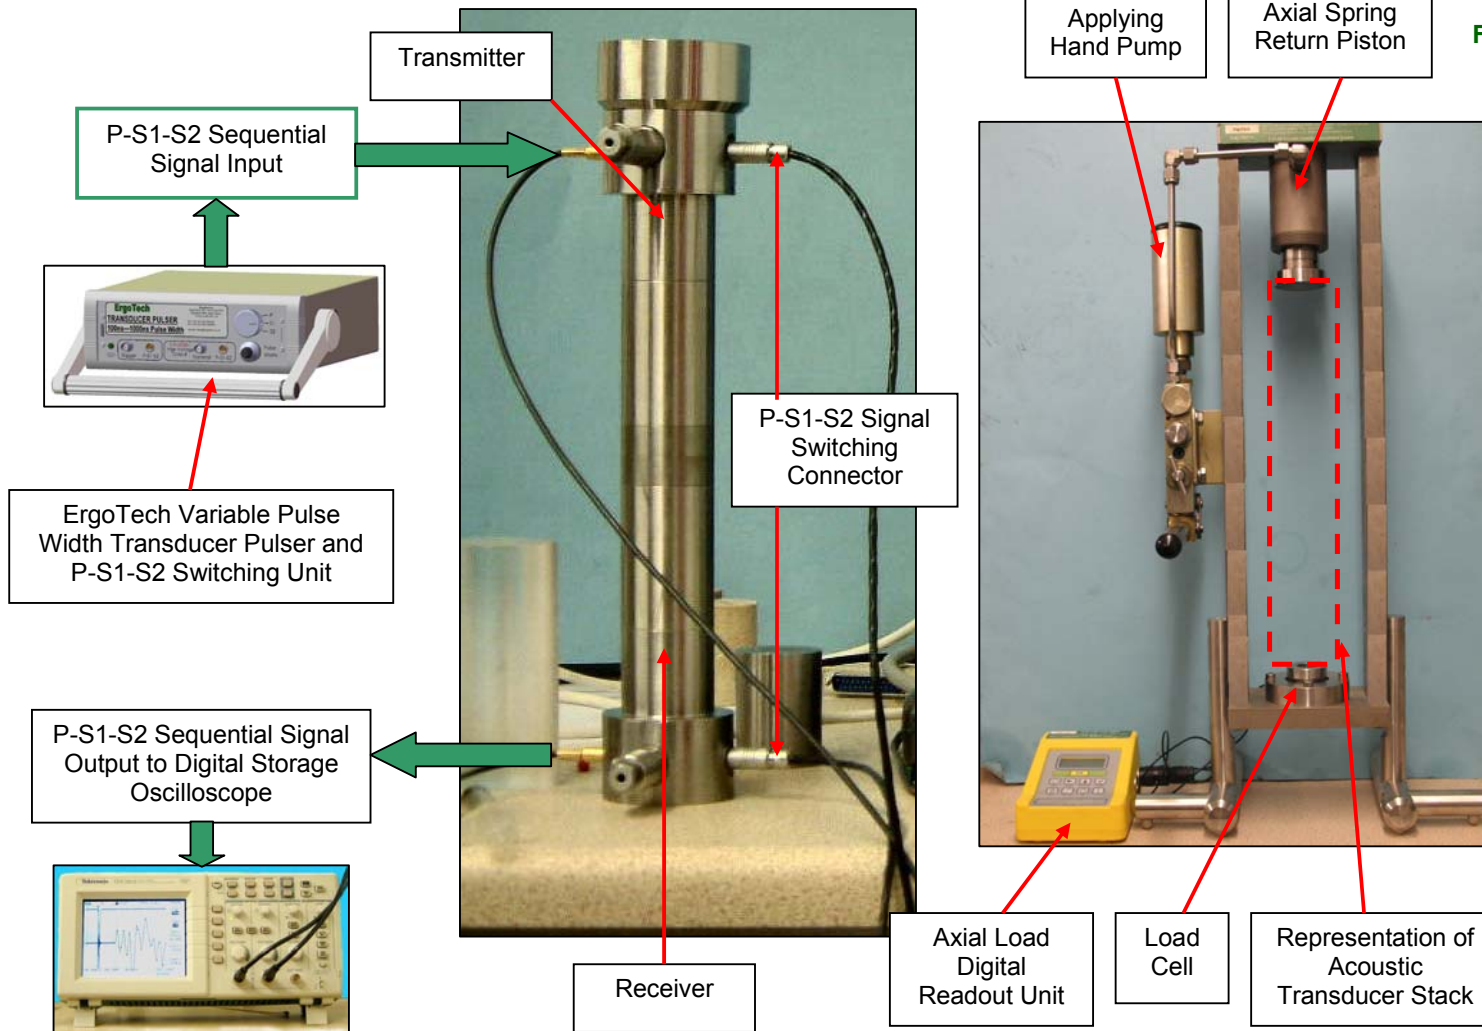

Features:

- Axial load applying platens incorporating P-S1-S2 acoustic transducers
- Maximum axial load of 100kN with standard Ø38.1mm (Ø1.5") axial platens relating to 87.7MPa contact stress on a Ø38.1mm (Ø1.5") sample.
- Bench top Straining Frame capable of axial loads of 100kN (10 tons)
- The straining frame comes complete with load cell and digital readout unit for axial load readouts
- The spring loaded axial load applying piston comes complete with hand pump mounted on the side of the straining frame
- Accommodates Ø38.1mm (Ø1.5") samples
- The system includes the ErgoTech Variable Pulse Width Transducer Pulser Unit (PT100-1000) with a variable pulse width range of 100-1000ns
- P-S1-S2 wave selection is controlled manually using the Transducer Pulser Unit
- The waveforms output to a Digital Storage Oscilloscope with RS232 output to PC
- **OPTIONAL: Fully configured PC / Laptop available**

This manual is copyright (c) and the associated procedure is the property of ErgoTech. It is issued confidentially to parties interested in acquiring the process and to authorised/licensed clients using it. The manual is not to be reproduced or circulated by any parties without the written consent of ErgoTech which will not be unduly withheld. The manual must not be mounted on any display boards or reproduced in reports without the written consent of ErgoTech. When permission is granted the reproduction must be identical to the original and the ownership the manual and the process embodied acknowledged to ErgoTech by displaying "ErgoTech (c)"

I:\PROMOTION - QUOTES - INFORMATION\Uniaxial Bench Top System\Uniaxial Bench Top Acoustic System.doc